

## 1. General description

Silicon Carbide Schottky diode in a TO220-2L plastic package, designed for high frequency switched-mode power supplies.

## 2. Features and benefits

- Highly stable switching performance
- High forward surge capability  $I_{FSM}$
- Extremely fast reverse recovery time
- Superior in efficiency to Silicon Diode alternatives
- Reduced losses in associated MOSFET
- Reduced EMI
- Reduced cooling requirements
- RoHS compliant
- High junction operating temperature capability ( $T_{j(max)} = 175^\circ\text{C}$ )

## 3. Applications

- Power factor correction
- Telecom / Server SMPS
- UPS
- PV inverter
- PC Silverbox
- LED / OLED TV
- Motor Drives

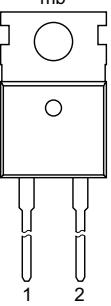

## 4. Quick reference data

Table 1. Quick reference data

Symbol	Parameter	Conditions	Values			Unit
<b>Absolute maximum rating</b>						
$V_{RRM}$	repetitive peak reverse voltage				1200	V
$I_{F(AV)}$	average forward current	$\delta = 0.5$ ; square-wave pulse; $T_{mb} \leq 160^\circ\text{C}$ ; <a href="#">Fig. 1</a> ; <a href="#">Fig. 2</a> ; <a href="#">Fig. 3</a> ; <a href="#">Fig. 4</a>			2	A
$T_j$	junction temperature				175	$^\circ\text{C}$
Symbol	Parameter	Conditions	Min	Typ	Max	Unit
<b>Static characteristics</b>						
$V_F$	forward voltage	$I_F = 2\text{ A}; T_j = 25^\circ\text{C}$ ; <a href="#">Fig. 6</a>	-	1.4	1.6	V
		$I_F = 2\text{ A}; T_j = 150^\circ\text{C}$ ; <a href="#">Fig. 6</a>	-	1.85	2.3	V
		$I_F = 2\text{ A}; T_j = 175^\circ\text{C}$ ; <a href="#">Fig. 6</a>	-	2	2.6	V
<b>Dynamic characteristics</b>						
$Q_r$	recovered charge	$I_F = 2\text{ A}; V_R = 400\text{ V}; dI_F/dt = 500\text{ A}/\mu\text{s}$ ; $T_j = 25^\circ\text{C}$ ; <a href="#">Fig. 8</a>	-	10	-	nC

## 5. Pinning information

**Table 2. Pinning information**

Pin	Symbol	Description	Simplified outline	Graphic symbol
1	K	cathode		
2	A	anode		
mb	K	mounting base; connected to cathod		

## 6. Ordering information

**Table 3. Ordering information**

Type number	Package name	Orderable part number	Packing method	Small packing quantity	Package version	Package issue date
GKTSC021200	TO220-2L	GKTSC021200Q	Tube	50	SOD59A	30-Mar-2015

## 7. Marking

**Table 4. Marking codes**


Type number	Marking codes
GKTSC021200	GKTSC021200


## 8. Limiting values

**Table 5. Limiting values**


In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Values	Unit
$V_{RRM}$	repetitive peak reverse voltage		1200	V
$V_{RWM}$	crest working reverse voltage		1200	V
$V_R$	reverse voltage	DC	1200	V
$I_{F(AV)}$	average forward current	$\delta = 0.5$ ; square-wave pulse; $T_{mb} \leq 160$ °C; <a href="#">Fig. 1</a> ; <a href="#">Fig. 2</a> ; <a href="#">Fig. 3</a> ; <a href="#">Fig. 4</a>	2	A
$I_{FRM}$	repetitive peak forward current	$\delta = 0.5$ ; $t_p = 25$ µs; $T_{mb} \leq 160$ °C; square-wave pulse	4	A
$I_{FSM}$	non-repetitive peak forward current	$t_p = 10$ ms; $T_{j(init)} = 25$ °C; sine-wave pulse	26	A
		$t_p = 10$ µs; $T_{j(init)} = 25$ °C; sine-wave pulse	250	A
$I^2t$	$I^2t$ for fusing	sine-wave pulse; $T_{j(init)} = 25$ °C; $t_p = 10$ ms	3	A <sup>2</sup> s
$T_{stg}$	storage temperature		-55 to 175	°C
$T_j$	junction temperature		175	°C

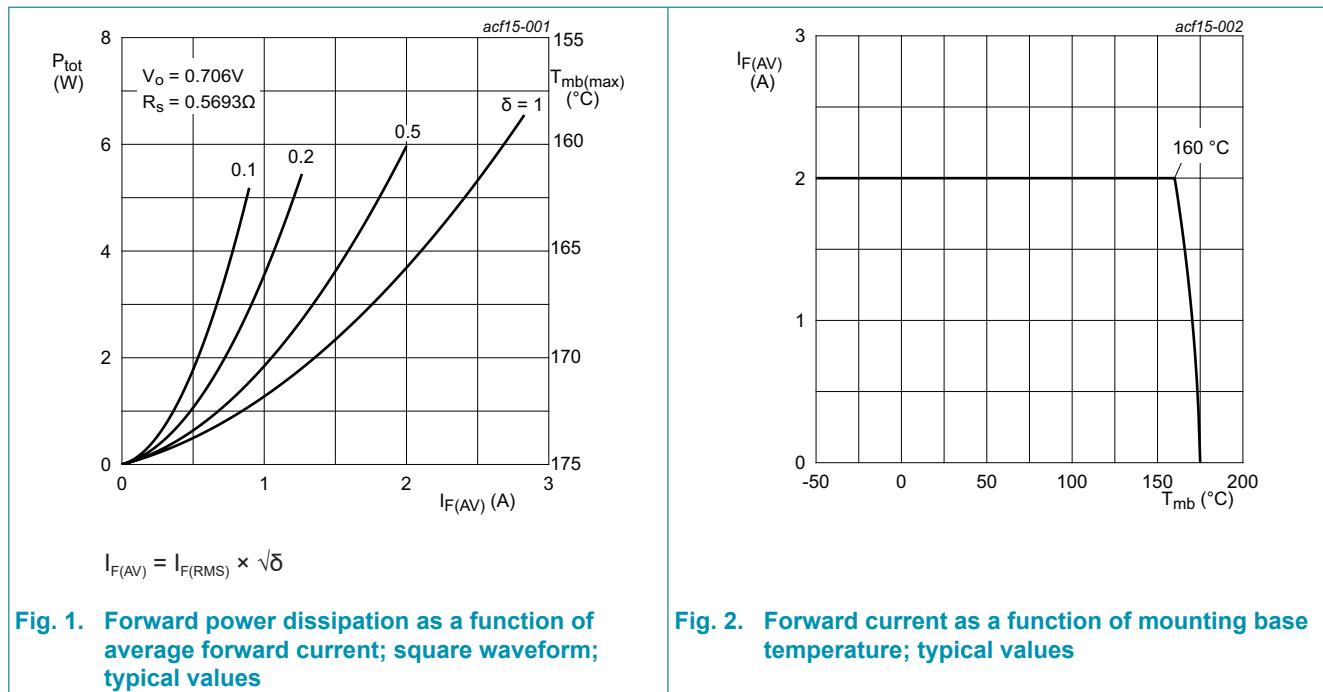

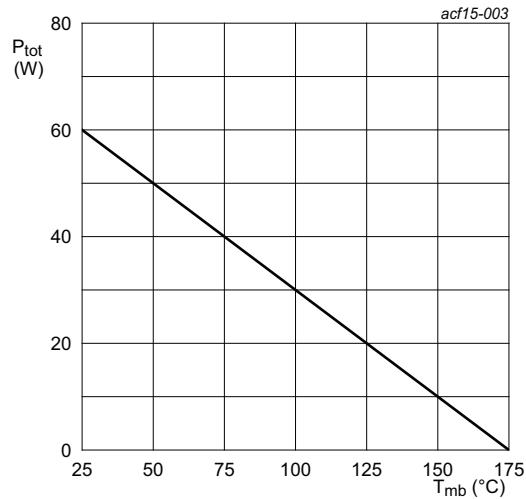

**Fig. 3. Total power dissipation as a function of mounting base temperature**

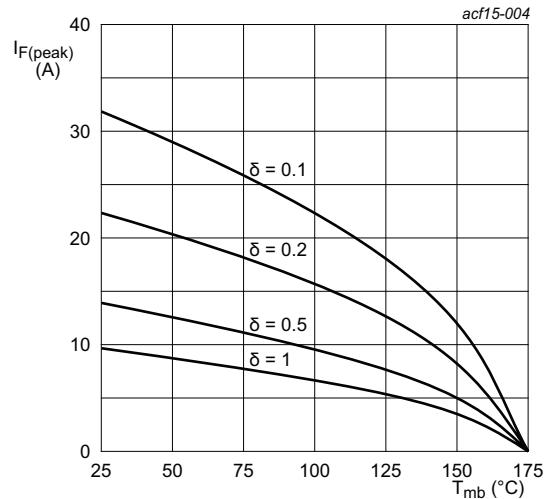

**Fig. 4. Current derating as a function of mounting base temperature**

## 9. Thermal characteristics

Table 6. Thermal characteristics

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
$R_{th(j\text{-}mb)}$	thermal resistance from junction to mounting base	<a href="#">Fig. 5</a>		-	-	2.5	K/W
$R_{th(j\text{-}a)}$	thermal resistance from junction to ambient free air	in free air		-	60	-	K/W


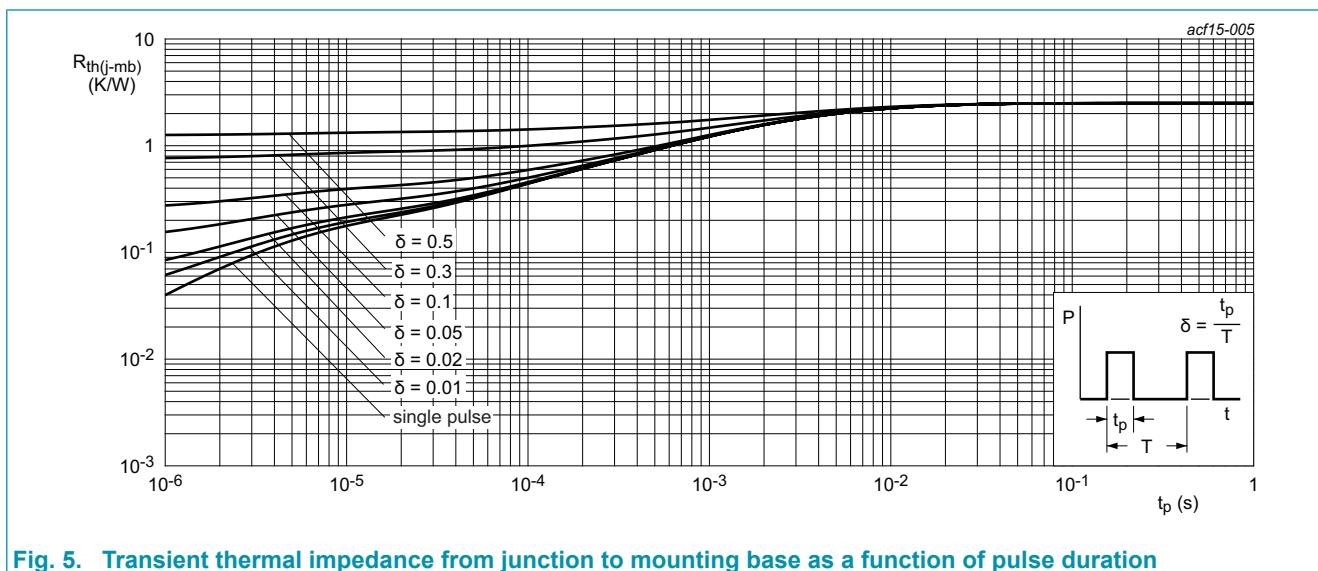


Fig. 5. Transient thermal impedance from junction to mounting base as a function of pulse duration

## 10. Characteristics

Table 7. Characteristics

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
<b>Static characteristics</b>							
$V_F$	forward current	$I_F = 2 \text{ A}; T_j = 25^\circ\text{C}$ ; Fig. 6		-	1.4	1.6	V
		$I_F = 2 \text{ A}; T_j = 150^\circ\text{C}$ ; Fig. 6		-	1.85	2.3	V
		$I_F = 2 \text{ A}; T_j = 175^\circ\text{C}$ ; Fig. 6		-	2	2.6	V
$I_R$	reverse current	$V_R = 1200 \text{ V}; T_j = 25^\circ\text{C}$ ; Fig. 7		-	2	20	$\mu\text{A}$
		$V_R = 1200 \text{ V}; T_j = 175^\circ\text{C}$ ; Fig. 7		-	80	-	$\mu\text{A}$
<b>Dynamic characteristics</b>							
$Q_r$	recovered charge	$I_F = 10 \text{ A}; V_R = 400 \text{ V}; dI_F/dt = 500 \text{ A}/\mu\text{s}$ ; $T_j = 25^\circ\text{C}$ ; Fig. 8		-	10	-	nC
$C_d$	diode capacitance	$f = 1 \text{ MHz}; V_R = 1 \text{ V}; T_j = 25^\circ\text{C}$		-	109	-	pF
		$f = 1 \text{ MHz}; V_R = 400 \text{ V}; T_j = 25^\circ\text{C}$		-	11.5	-	pF
		$f = 1 \text{ MHz}; V_R = 800 \text{ V}; T_j = 25^\circ\text{C}$		-	9.8	-	pF

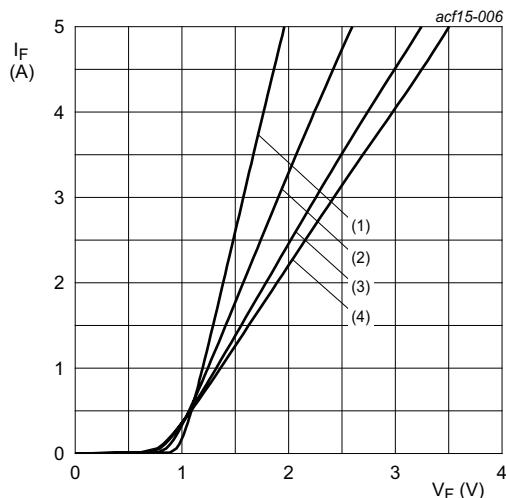

- (1)  $T_j = 25^\circ\text{C}$ ; typical values
- (2)  $T_j = 100^\circ\text{C}$ ; typical values
- (3)  $T_j = 150^\circ\text{C}$ ; typical values
- (4)  $T_j = 175^\circ\text{C}$ ; typical values

Fig. 6. Forward current as a function of forward voltage; typical values


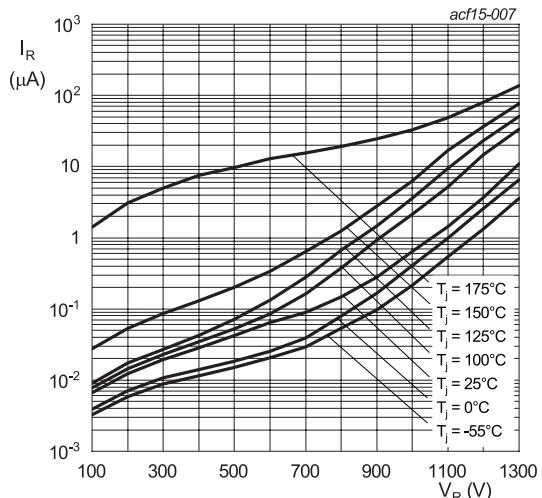


Fig. 7. Reverse leakage current as a function of reverse voltage; typical value

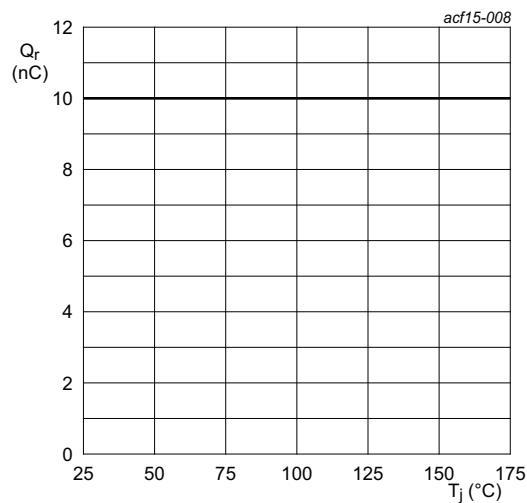


**Fig. 8. Recovered charge as a function of junction temperature**

## 11. Package outline

Plastic single-ended package; heatsink mounted; 1 mounting hole; 2-lead TO-220AC

SOD59A

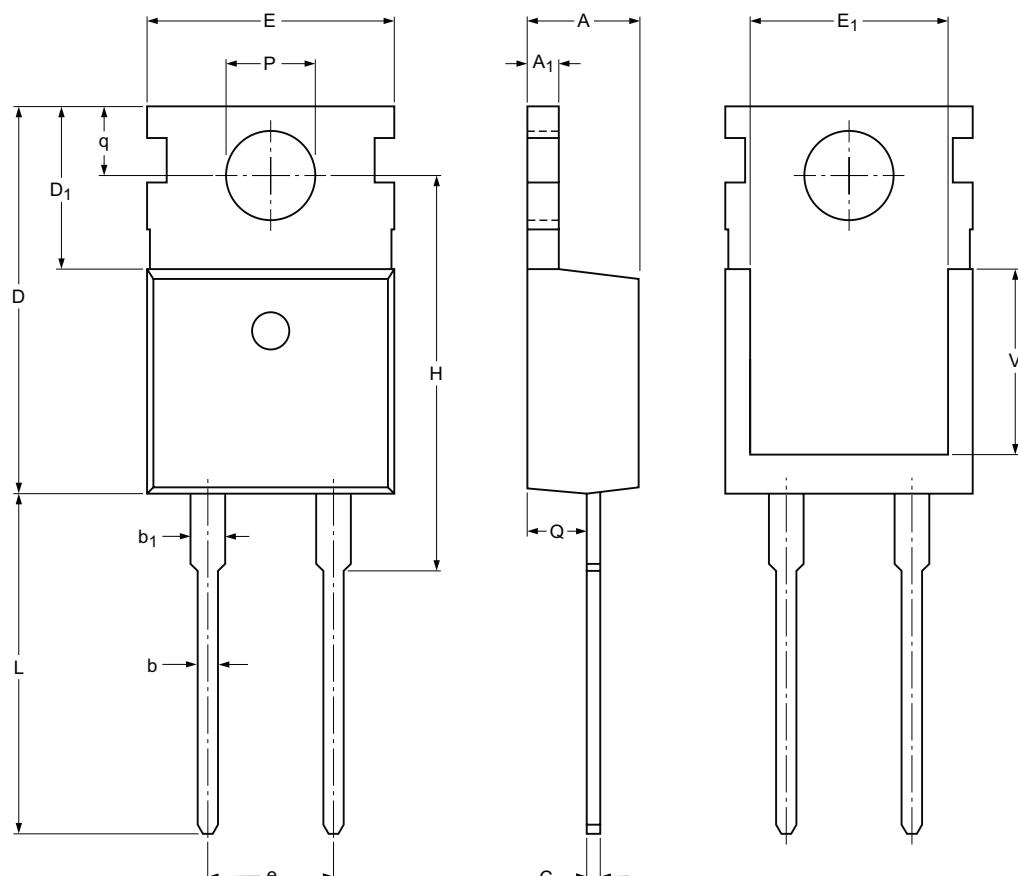

Dimensions: (mm are the original dimensions)

0      5      10 mm  
scale

Unit	A	A <sub>1</sub>	b	b <sub>1</sub> <sup>(1)</sup>	c	D	D <sub>1</sub>	E	e	H	L	P	Q	q	E <sub>1</sub>	V	
mm	max	4.7	1.40	0.95	1.70	0.65	15.8	6.8	10.30	5.08	16.25	15.0	3.80	2.6	2.95	8.1	6.9
mm	nom	4.3	1.15	0.70	1.17	0.45	15.6	6.4	9.65	(REF)	15.70	12.5	3.53	2.2	2.65	7.9	(REF)

Note

1. Protruded dambar are included in the dimension.

sod59a\_po

Outline version	References				European projection	Issue date
	IEC	JEDEC	JEITA			
SOD59A	TO-220AC (2-lead)					-15-03-24- 15-03-30

### IMPORTANT NOTICE – PLEASE READ CAREFULLY

SZGKTMicroelectronics NV and its subsidiaries reserve the right to make changes, corrections, enhancements, modifications, and improvements to SZGKT.